


## COMO 3 OUTLET CONCEALED SHOWER PACK

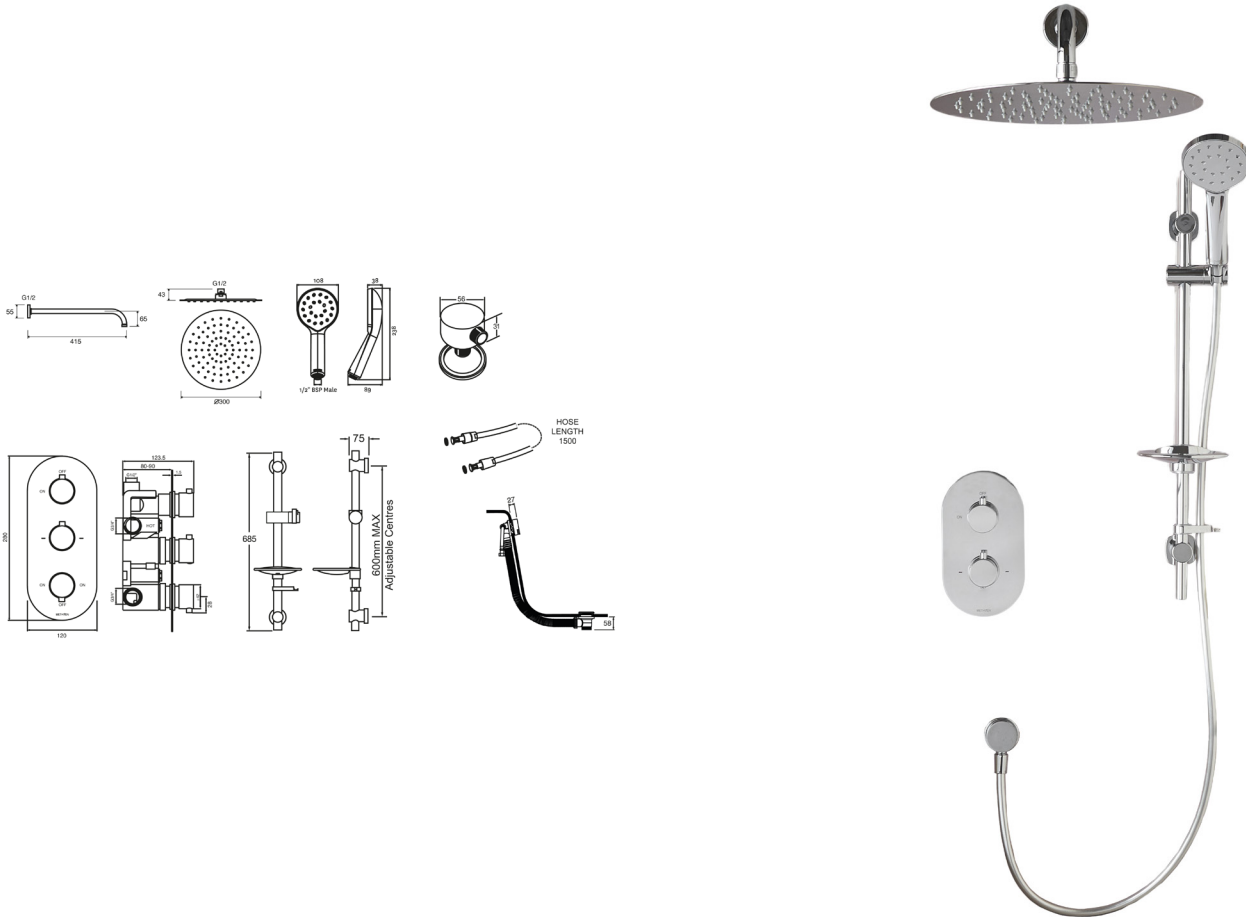

**CONSTRUCTION:** Brass & ABS Handset  
**CARTRIDGE/VALVE TYPE:** Thermostatic  
**SUPPLY:** Suitable For Low Pressure Systems  
**INLET CONNECTIONS:** 1/2" BSP  
**WORKING PRESSURES:** 0.3 - 5.0 bar  
**OPERATION:** Separate Flow And Temperature Controls

- Diverter cartridge to three outlets
- 38°C temperature hot stop with override facility
- Front access filters - no need to disconnect shower from water supply during maintenance
- Includes 300mm overhead at 8l/min
- Easy to fit shower rail - simply twist and lock brackets into place
- Smooth easy clean 1.5m shower hose
- Includes Kiri Mk2 Satinjet® Handset - Regulated To 8L/Min
- TMV2 approved valve

**CSPRo8** **Chrome**

**Open Outlet Flow (Bar - l/min)**

BAR	0.1	0.3	0.5	1.0	2.0	3.0	4.0	5.0
<b>HANDSET FLOW</b>	3.5	5.3	7	9	8	8.4	8.4	8.2
<b>OVERHEAD FLOW</b>	4.5	6.3	7.6	8.7	8	8.5	8.5	8.2



Please Note: Flow rate will be dictated by installation configurations.  
 Please ensure to check the appropriate flow restrictor information if applicable.  
 \*Please refer to website for full warranty details.

2402168

**FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM**

**methven.com**

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.