



CLEANING

Water contains lime which remains on the surface after the water has evaporated. These lime deposits can be prevented from forming by wiping immediately after use.

To clean the chrome-plated surface use a soft cloth, soap and warm water. Never use cleaning agents that contain a corrosive acid or a scouring additive.

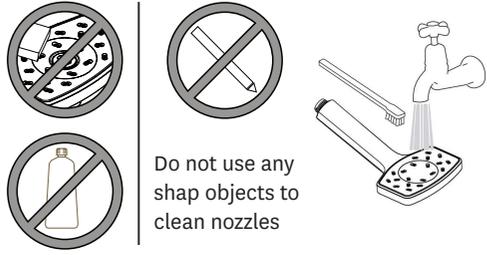


Do not use any sharp objects to clean nozzles

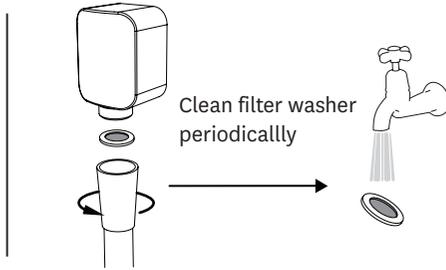

NOTES:

1) Low and unequal systems:
Removal of the flow restrictor with pliers may be necessary to optimise flow performance in low or unequal pressure systems only. Flow restrictor is lodged firmly in the end of the handset.

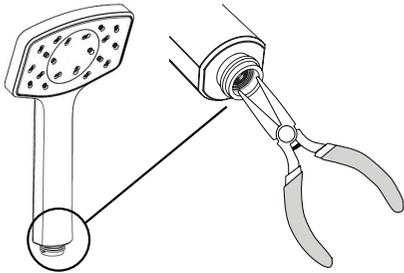

Methven warrants this product against manufacturing defects and that it is suitable for use under the general operating conditions specified in this instruction sheet. However, regional regulations apply and may affect our warranty. Please refer to www.methven.com or call customer service for full details.

New Zealand
0800 804 222

Australia
13 14 16

UK
0800 195 1602

WAIPORI RAIL SHOWER /HANDSET INSTALLATION GUIDE

TECHNICAL SPECIFICATIONS

Operating Pressure:

Min 35 kPa, Max 500 kPa.

Recommended installation of a pressure limiting valve if supply exceeds 500kPa.

Operating Temperature:

Recommended hot water supply 50°C, maximum 70°C. AS/NZS 3500 requires all hot water supplies to any sanitary fitting to be tempered to 50°C.

Inlet connections: All 1/2" BSP

Notes:

- After installation all connections must be checked for leaks.
- All installations must be carried out in compliance with relevant water regulations.



METHVEN
www.methven.com

