

Important – Please read all of the instructions before installation

This Minimalist Sink Mixer is designed for equal and unequal pressure systems.

This mixer is not recommended for use in uncontrolled heating systems such as wetbacks or solar heater units unless a NEFA TLV valve is fitted. BIA G12 requires all hot water supplies to any sanitary outlet to be tempered to 55°C.

ALL PIPEWORK MUST BE THOROUGHLY FLUSHED PRIOR TO INSTALLATION OF THE MIXER. AN INLINE FILTER MUST BE FITTED TO PREVENT FOREIGN PARTICLES DAMAGING THE CERAMIC CARTRIDGE.

Technical specifications

Operating Pressure: Recommended 150 – 500kPa Min 35kPa Max 1000kPa

Hot Supply Temperature: Recommended 55 – 65°C at the mixer. Max 80°C

Inlet Connections: All ½” BSP

Unequal and Low Pressure Situations

Install the mixer without modification

Equal High (Mains) Pressure Situations

To achieve stated WELS rating, replace dropless aerator with flow restricted aerator


Installation Instructions

A single 38mm (1 ½”) diameter hole is required in the mounting surface. The mount surface can be a maximum of 40mm thick.



Screw the threaded rods into the base of the mixer. Insert the O ring into the groove in the bottom of the base ring and fit the base ring into the bottom of the sink mixer. Insert the flexible hoses through the hole in the mounting surface (from the underside) and screw them into the base of the sink mixer.

Feed the threaded rods through the hole in the mounting surface. Fit the mounting gasket and mounting plate onto the threaded rods. Tighten the mounting nuts to secure the basin mixer in place. Connect the flexible hoses to the hot and cold supplies (hot on the left, cold on the right).

Two rubber washers are provided for the flexible hose connections to the nipples. Machined nipple ends are required to ensure a seal to the flexible hose nuts and the rubber washers.

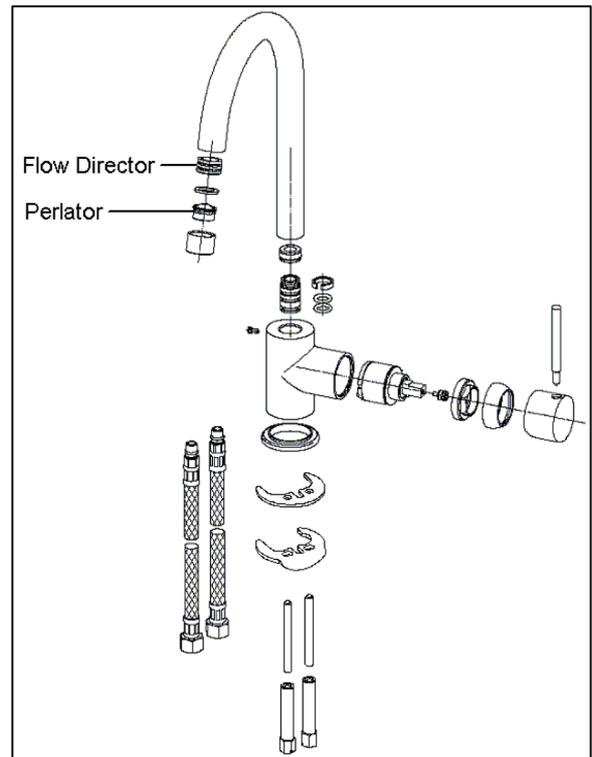

Hose Requirements

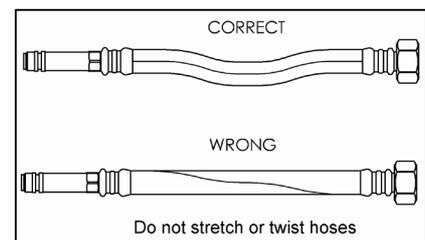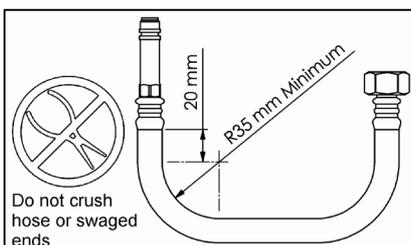

Methven warrants this product against manufacturing defects and that it is suitable for use under the general operating conditions specified in this instruction sheet. However, regional regulations apply and may affect your warranty. Please refer to www.methven.com or call customer service for full details.

New Zealand
0800 804 222

Australia
1300 638 483

UK
0800 195 1602