

KIRI SYSTEM DRENCHER INSTALLATION GUIDE

TECHNICAL SPECIFICATIONS

Operating Pressure:


Min 150 kPa, Max 500 kPa.

Recommended installation of a pressure limiting valve if supply exceeds 500 kPa.

Operating Temperature:

Max 70°C

NB: New Zealand building code clause G12 - water supplies specifies all outlets used primarily for personal hygiene shall deliver water at a safe temperature.

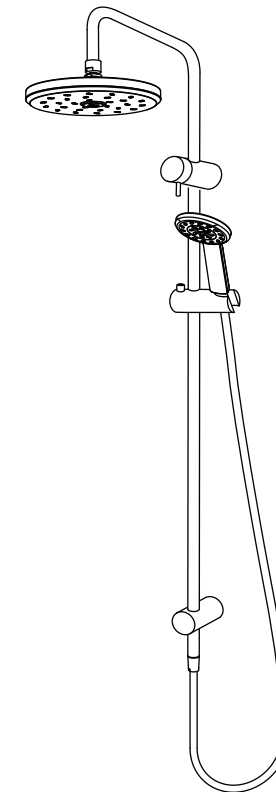


Methven warrants this product against manufacturing defects and that it is suitable for use under the operating conditions specified in this instruction sheet.

For your warranty please refer to www.methven.com or call Customer Service: 0800 804 222




1.

WATER INLET: RECOMMENDED MINIMUM HEIGHT OF 1800mm FROM FLOOR LEVEL

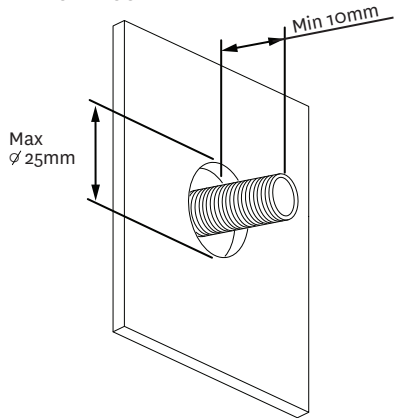


Install a 1/2" male threaded connection at the recommended height on wall, ensuring that a minimum of 10mm of thread protrudes past the finished wall.

2.

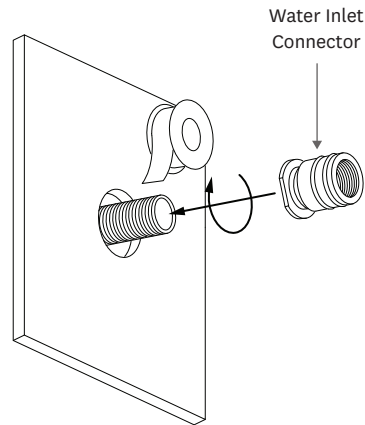


Apply thread tape (or similar) to the 1/2" connection, then screw the top rail connector to the connection.

3.

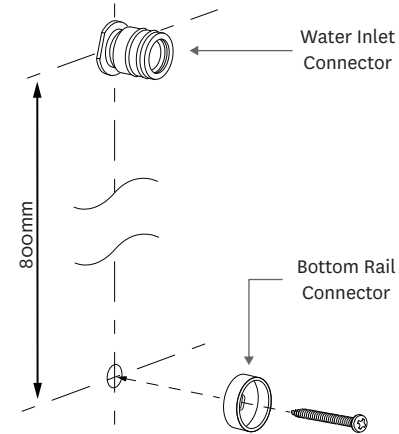


Screw the bottom rail connector to a wall stud making sure it is vertically in line with the top rail connector. Maximum centre distance between the top and bottom shower connections is 800mm.

4.

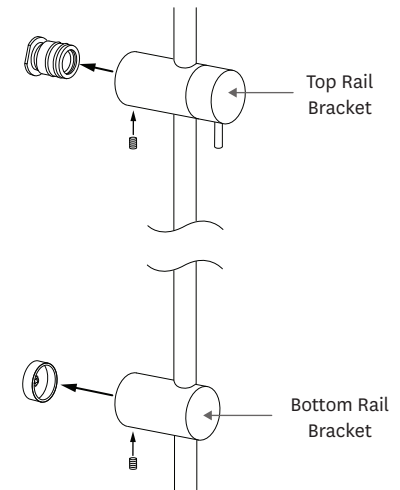


Check the grub screws are wound out. Push the rail brackets onto the top and bottom rail connectors until they are against wall. Secure with grub screws.

5.

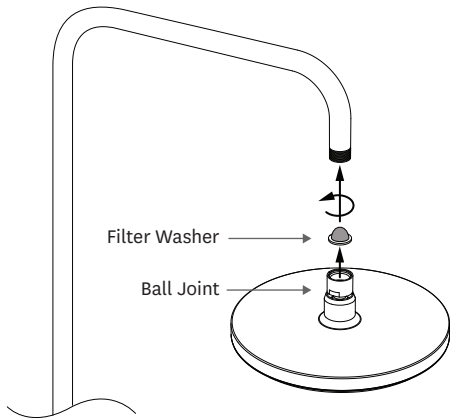

Remove the protective cap from the showerhead ball joint and screw the unit onto the overhead arm ensuring the filter washer is in place.

6.

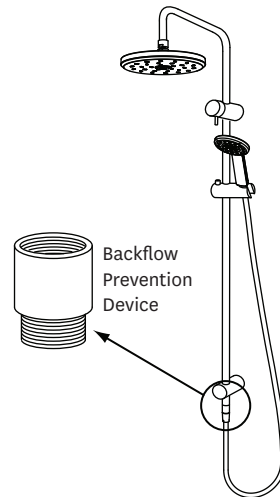

Make sure a washer is in both ends of the hose. Screw hose onto lower outlet on wet rail, attach handset and place firmly in holder. Tilt and rotate head to the desired position.


CLEANING

Water contains lime which remains on the surface after the water has evaporated. These lime deposits can be prevented from forming by wiping immediately after use.

To clean the chrome-plated surfaces use a soft cloth, soap and warm water. Never use cleaning agents that contain a corrosive acid or a scouring additive.



Do not use any sharp objects to clean nozzles



Clean filter washer periodically.

